

NON-PROGRAMMABLE FLOOR HEATING THERMOSTAT CONCERTO (FLK50)



ADDED VALUE

- Floor or ambient temperature control
- Built-in ground fault circuit interrupter (Class A GFCI)
- Detailed energy consumption reports
- Backlit display
- Floor sensor (15 feet) included
- Auxiliary output allowing the control of an auxiliary heating system
- Protection for engineered wood flooring and soft coverings
- 3-year warranty

SPECIFICATIONS

Operating voltage: 120 / 208 / 240 Vac, 50 / 60 Hz

Maximum load:

1800 W @ 120 Vac / 15 A

3120 W @ 208 Vac / 15 A

3600 W @ 240 Vac / 15 A

Setpoint range: 5 °C to 36 °C (41 °F to 96 °F)

Display range: 0 °C to 50 °C (32 °F to 122 °F)


Resolution: ±0.5 °C (±1 °F)

Storage: -20 °C to 50 °C (-4 °F to 122 °F)

Auxiliary output: 24 Vac / Vdc / 0.1 A

Compatibility: 10K / 12K sensors at 25 °C

Floor sensor included.

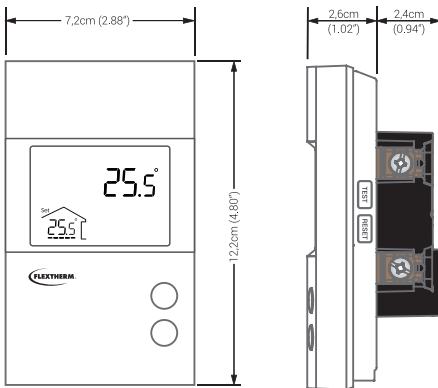

FLK50

270-0736-0000-A



Floor Warming and Heating Systems

T. : 450.442.2999

flextherm.com

client@flextherm.com

Longueuil, Qc, Canada

S.F. : 1 800 353-9843